

**VPB15A4-12W/1Z****Description**

VPB series PDU is the device power access solution provided by VERICOM. Used to power IT equipment.

VPB15A4-12W/1Z features US plug input 15A 250VAC, 12 Port Universal outlets protected by a switch and overload protection. Vertical installation, black.

Benefits**Convenient installation**

- Rotating fixed bracket, suitable for horizontal, vertical and other installation angles.

Thicker cable

- Less resistance, stable current, stable conduction, safe use of electricity

Comprehensive protection

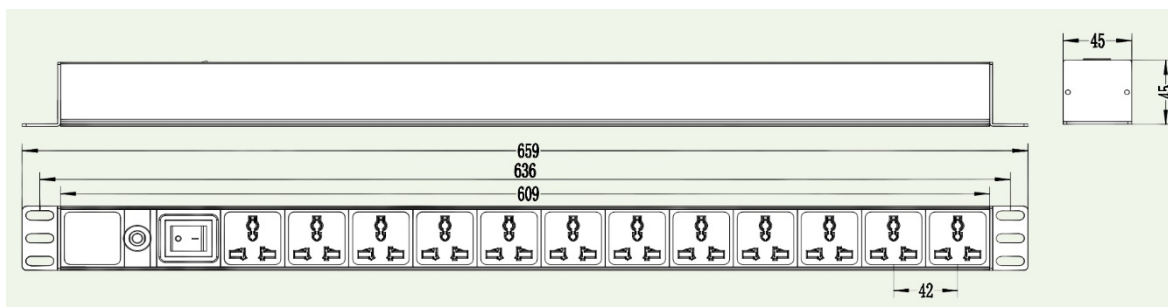
- The main switch is equipped with a protective dust cover that prevents accidental shutoffs

Sturdy and durable

- Made from high ductile strength material that resists damage.

Grounding design

- Reasonable grounding design prevents accidental electric shock

Installation Dimension



VPB15A4-12W/1Z

Electrical	
Input Voltage	250VAC
Input Current	15A
Input Frequency	50/60 Hz
Input Plug	15A US type
Output Voltage	250VAC
Output Current	10A
Maximum Output Current	10A
Output Receptacles	(12) Universal type
Physical	
Dimensions	659x45x45 mm
Installation	19 Inch
Weight	1200 g
Shipping Dimensions	680x94x56 mm
Shipping Weight	1400 g
Color	black
Power Cord Length	2.0 m (factory standard)
Environmental	
Maximum Elevation Above MSL (Operating/Storage)	0 to 3,000 m/ 0 to 15,000m
Humidity (Operating/Storage)	5 - 95%RH/ 5-95, Non-condensing
Temperature (Operating/Storage)	0 - 45°C/ -20 to 70°C
Certifications	
Certifications	RoHS..

Notes:

*The above drawings are for reference only, subject to the material object