



## VPB15A4-10W/1Z

### Description

VPB series PDU is the device power access solution provided by VERICOM. Used to power IT equipment. VPB15A4-10W/1Z features US plug input 10A 250VAC, 10 Port Universal outlets protected by a switch and overload protection. Vertical installation, black.

### Benefits

#### Convenient installation

- Rotating fixed bracket, suitable for horizontal, vertical and other installation angles.

#### Thicker cable

- Less resistance, stable current, stable conduction, safe use of electricity

#### Comprehensive protection

- The main switch is equipped with a protective dust cover that prevents accidental shutoffs


#### Sturdy and durable

- Made from high ductile strength material that resists damage.

#### Grounding design

- Reasonable grounding design prevents accidental electric shock

### Installation Dimension

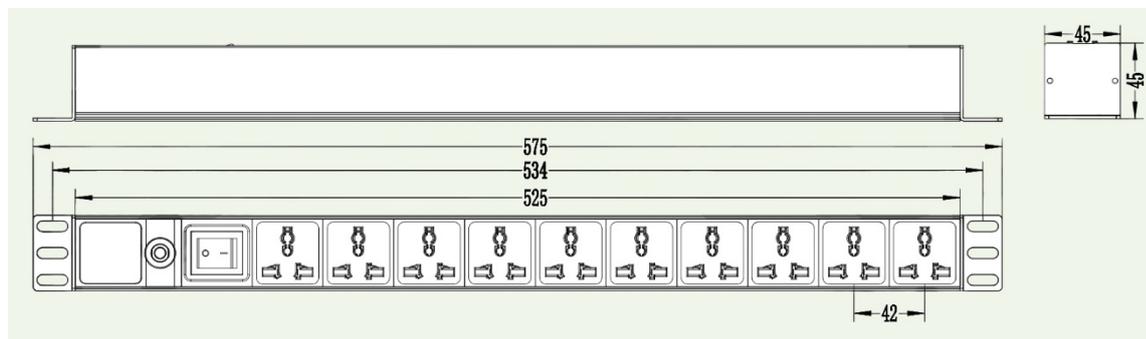



## VPB15A4-10W/1Z

| Electrical                                      |                                 |
|---|---------------------------------|
| Input Voltage                                   | 250VAC                          |
| Input Current                                   | 15A                             |
| Input Frequency                                 | 50/60 Hz                        |
| Input Plug                                      | 15A US type                     |
| Output Voltage                                  | 250VAC                          |
| Output Current                                  | 10A                             |
| Maximum Output Current                          | 10A                             |
| Output Receptacles                              | (10) Universal type             |
| Physical  |                                 |
| Dimensions                                      | 575x45x45 mm                    |
| Installation                                    | 19 Inch                         |
| Weight  | 1000 g                          |
| Shipping Dimensions                             | 600x94x56 mm                    |
| Shipping Weight                                 | 1200 g                          |
| Color   | black                           |
| Power Cord Length                               | 2.0 m (factory standard)        |
| Environmental                                   |                                 |
| Maximum Elevation Above MSL (Operating/Storage) | 0 to 3,000 m/ 0 to 15,000m      |
| Humidity (Operating/Storage)                    | 5 - 95%RH/ 5-95, Non-condensing |
| Temperature (Operating/Storage)                 | 0 - 45°C/ -20 to 70°C           |
| Certifications                                  |                                 |
| Certifications                                  | RoHS..                          |

## Notes:

\*The above drawings are for reference only, subject to the material object