




## Optical Distribution Frame

### Features & Benefits

- 19" standard installation
- Metal structure, electrostatic power-coated surface
- Plastic components, light structure
- Low Insertion Loss
- Pull-out design with fiber splicing accessories
- SC, FC, ST, Duplex LC adaptors optional
- Suitable for bundle and ribbon fiber cables, with sufficient storage space for both optical fiber cables and pigtails

### Drawing

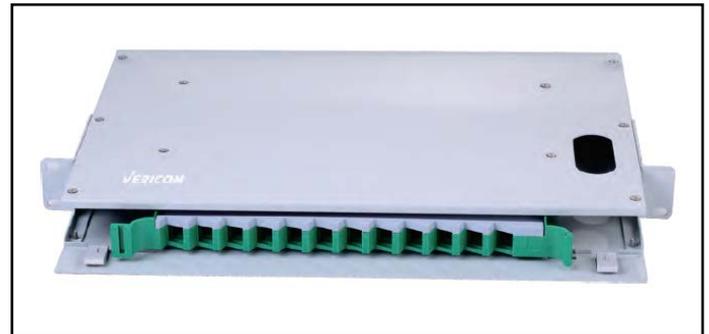

### Compliance & Standards

- ISO/IEC 11801
- ANSI/TIA/EIA-568-C.3

### Product Specifications

Material	SPCC	
Distribution Board Material	PVC	
Item Dimension (mm) Length x Width x Height	1U	482*300*44
	2U	482*300*88.5
	3U	482*300*132
	4U	482*300*177
	5U	482*300*221
Maximum Bending Space (mm)	≥30	
Max Fiber Count	192 Cores (5U)	
Adaptor	SC, FC, ST, LC Duplex	
Insertion Loss (dB)	≤0.3	
Return Loss (dB)	≥35 (UPC), ≥60 (APC)	



## Optical Distribution Frame

### Ordering Information

Part No.	Product Name	Description
FB1001-12ST	12 Ports ODF, Splice Tray Included, 1U, Unloaded	ST Adaptors
FB1001-12	12 Ports ODF, Splice Tray Included, 1U, Unloaded	SC, FC, LC Adaptors
FB1002-24ST	24 Ports ODF, Splice Tray Included, 2U, Unloaded	ST Adaptors
FB1002-24	24 Ports ODF, Splice Tray Included, 2U, Unloaded	SC, FC, LC Adaptors
FB1003-48ST	48 Ports ODF, Splice Tray Included, 3U, Unloaded	ST Adaptors
FB1003-48	48 Ports ODF, Splice Tray Included, 3U, Unloaded	SC, FC, LC Adaptors
FB1004-72ST	72 Ports ODF, Splice Tray Included, 4U, Unloaded	ST Adaptors
FB1004-72	72 Ports ODF, Splice Tray Included, 4U, Unloaded	SC, FC, LC Adaptors
FB1005-96ST	96 Ports ODF, Splice Tray Included, 5U, Unloaded	ST Adaptors
FB1005-96	96 Ports ODF, Splice Tray Included, 5U, Unloaded	SC, FC, LC Adaptors