



4 Post Fixed Depth Steel Relay Racks (VR1)



Product Specifications

Equipment Support	19" W, EIA-310-D Universal Hole Spacing 10-32 Threaded Holes and Cage Holes
Material	SPCC
Finish	Black Powder Coated
Static Loading Capacity	250kgs/550 lbs.
Included Accessories	(48) 10-32 Mounting Screws & Washers (48) 10-32 Cage Nuts (4) Adjustable Leveling Feet (1) Assembly Instructions
Compliance	ANSI/EIA RS-310D IEC60297-2 DIN41494; Part 1 DIN41494; Part 7

Description

Vericom 4 Post Fixed Depth Server Racks are a great solution for a variety of installation environments:

- Floor mounting - base is pre-drilled for floor mounting.
- Uneven Surfaces-Includes 4 leveling feet for uneven surfaces.
- Mobility - compatible with locking and free-wheeling casters when mobility is required.

Constructed of cold rolled and powder-coated 1.5mm steel, these racks include both threaded and cage hole profiles, have a maximum load capacity of 250kgs/550lbs, and are available in a variety of configurations as shown below. Ships unassembled and flat packed for easy on-site handling.

Benefits

- Flexibility**
 - Open design provides exceptional airflow and fast / easy access to equipment
 - 4 adjustable levelers included to accommodate installation on uneven surfaces
 - Available in various sizes to fit individual needs

- Key Features**
 - 250kgs/550lbs. load capacity
 - Durable 1.5mm steel construction
 - Base plates are pre-drilled for mounting to floor
 - Small footprint
 - Flat packed and easy to assemble



4 Post Fixed Depth Steel Relay Racks (VR1)

Main part

S/N	Specification	QTY	Material	Surface	Coating Thickness
1	Frame Column	4	SPCC t1.5	Powder Coated	Between 20-40µm
2	Support Beam	2	SPCC t2.0	Powder Coated	Between 20-40µm
3	Frame Beam	4	SPCC t2.0	Powder Coated	Between 20-40µm
4	Side Pull Beam	2	SPCC t2.0	Powder Coated	Between 20-40µm
5	Bottom Cover Plate	2	SPCC t1.2	Powder Coated	Between 20-40µm
6	M12 Adjustable Feet	4	----	----	----


Optional Accessories

Part No.	Description
RASC122	12" Cantilever Shelf, 2U
RAMPFD2	Horizontal Finger Duct Cable Manager, 2U
RAMS5D1	Horizontal D-Ring Cable Manager, 1U
RAMSRG1	Steel Ring Cable Manager, 1U
RAMVT45	Vertical Trough Cable Manager, 45U




4 Post Fixed Depth Steel Relay Racks (VR1)

Technical Illustration

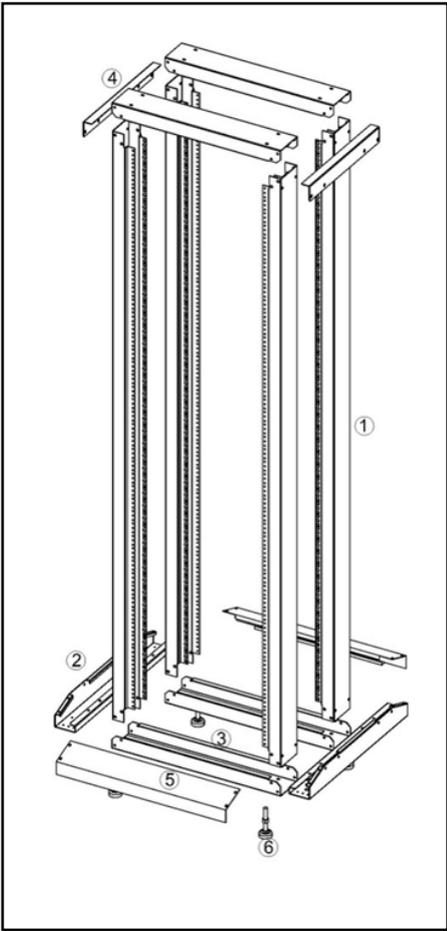


Technical Drawing

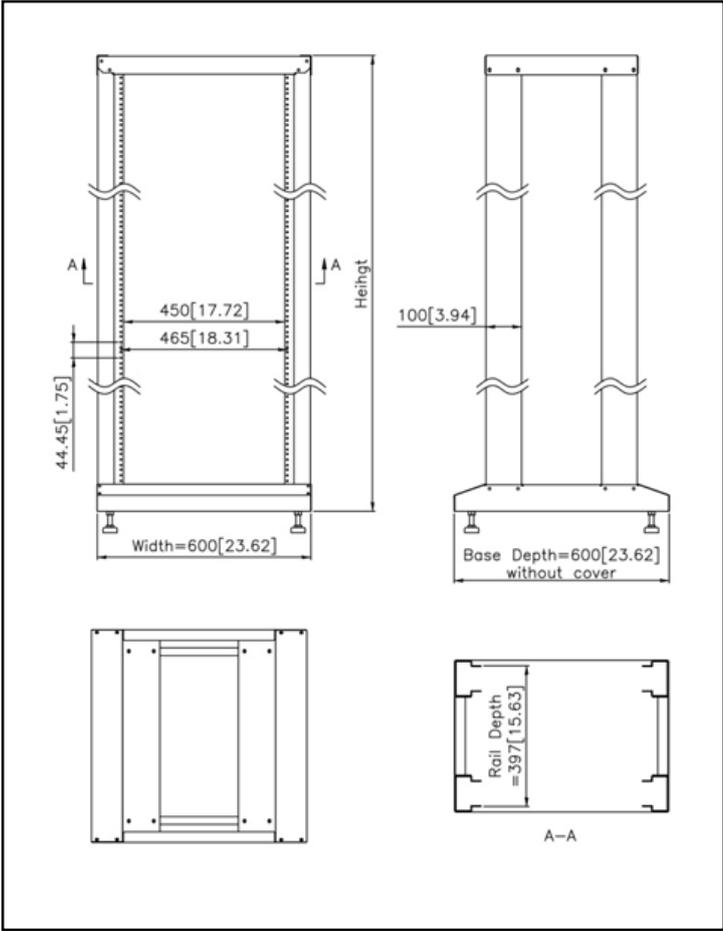



4 Post Fixed Depth Steel Relay Racks (VR1)

Item Number Configuration

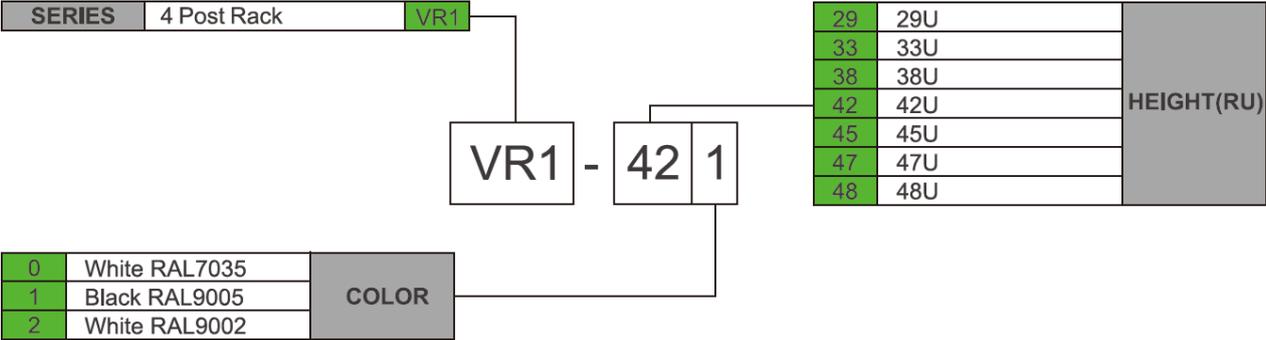

Ordering Information

Part No.	RU	Height mm[inch]	Width mm[inch]	Depth mm[inch]	Rail Depth mm[inch]
VR1-29 ■	29	1422[56.00]	600[23.62]	600[23.62]	397[15.63]
VR1-33 ■	33	1600[63.00]			
VR1-38 ■	38	1822[71.75]			
VR1-42 ■	42	2000[78.75]			
VR1-45 ■	45	2133[84.00]			
VR1-47 ■	47	2222[87.50]			
VR1-48 ■	48	2267[89.24]			

Note: Size and capacity can be customized.