



Category 6A 24 Port Patch Panel, Unshielded, Angled Jack


Features & Benefits

- Meet and exceed Category 6A performance
- Special layout to improve the ANEXT performance
- Angled jack for easy cable management
- Snap-in design for easy installation and maintenance
- Convenient and clear marking
- Rear cable management

Compliance & Standards

- ANSI/TIA-568.2-D Category 6A
- ISO/IEC 11801 Class E

Drawing

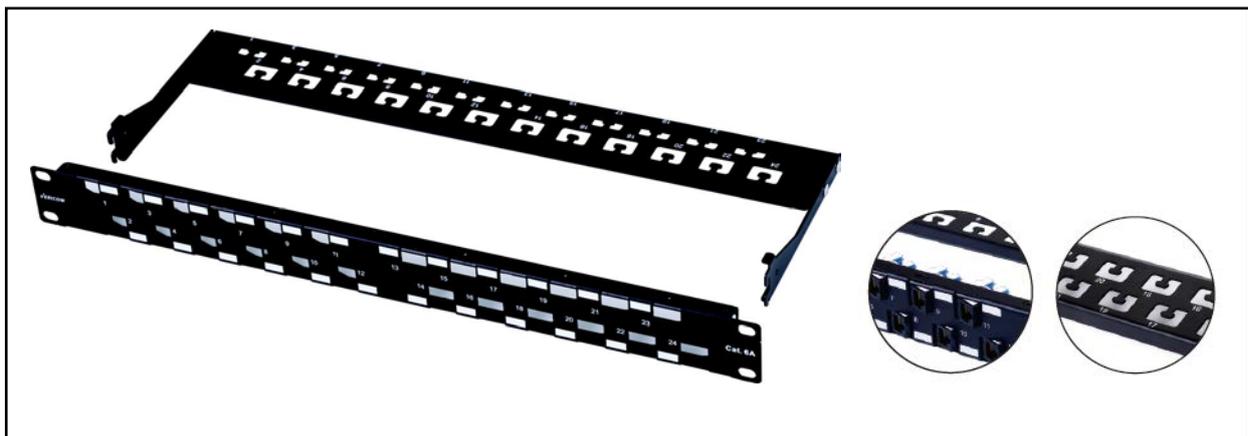

Product Specifications

Material	Cold Rolled Steel Plate
Clarification	VERICOM®
Dimension	482.6*161.4*44 mm Max.
Installation	Standard 19" Installation



Category 6A 24 Port Patch Panel, Unshielded, Angled Jack

Physical Performance

IDC	Phosphor Bronze
RJ45 Pin	Phosphor Bronze With 50u" Gold Plating
Plug Insertion	≥1000 times
IDC Insertion Life Span	≥250 times
AWG	22-26 AWG
Termination Wiring	T568A/T568B
Termination Conductor	Solid Conductor or Stranded Conductor
Operation Temperature	-10°C to + 60°C

Electrical Performance

Dielectric Strength	DC1000V(AC 750V), 1min, No Breakdown and Arcing Phenomena
DC Resistance	≤300mΩ
Connecting Resistance	≤20mΩ
Insulation Resistance	Under Normal Atmospheric Pressure ≥500MΩ
Min. Insulation Resistance(Ω)	100MΩ
Rated Current	0.75 Amp

Ordering Information

Part No.	Product Name	Description
PP6601-24	Category 6A 24 Ports Patch Panel	Fully Loaded, Angled Jack