



Optical Fiber Termination Box


Features & Benefits

- Applied to FTTH application
- Compacted structure
- Offer water-proof and dust-proof protection up to IP65
- Integrated with fiber splicing, fixation, storage and distribution
- SC Simplex and LC Duplex adaptors
- Independent routing for fiber cable, pigtails and patch cord for better cable management
- Suitable for the wall mounted installation
- PLC Splitter optional

Compliance & Standards

- ISO/IEC 11801
- ANSI/TIA/EIA 568-C.3

Technical Drawing

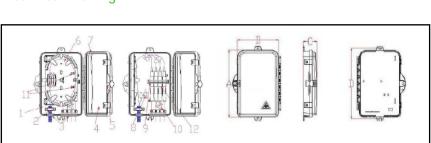

Product Specifications

Material	PC+ABS
Size	186*116*40mm
Maximum Fiber Count	4 Cores SC Simplex; 8 Cores LC Duplex
Operating Temperature	40℃~+85℃

Ordering Information

Part No.	Product Name	Description
DBDN004	Optical Fiber Termination Box, 4Ports, Unloaded	4 Cores SC Simplex, 8 Cores LC Duplex

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20200901.1

Drawing

