



### VPB16A6-08D/4H

#### Description


VPB series PDU is the device power access solution provided by VERICOM and used to power IT equipment. VPB16A6-08D/4H features German plug input 16A250VAC, 08 Port German outlets protected by a switch. It is horizontal installation and black.

# Features & Benefits

- Convenient Installation
   Rotating fixed bracket, suitable for horizontal, vertical and other installation angles

   Thicker Cable
- Less resistance, stable current, stable conduction, safe use of electricity
- Comprehensive Protection The main switch is equipped with a protective dust cover that prevents accidental shutoffs
- Sturdy and Durable Made from high ductile strength material that resists damage
- Grounding Design
   Reasonable grounding design prevents accidental electric shock

### **Installation Dimensions**

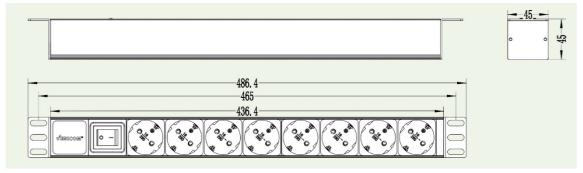

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOU NOTICE.

REV.20210220.1





# VPB16A6-08D/4H

# **Product Specifications**

Electrical	
Input Voltage	250VAC
Input Current	16A
Input Frequency	50/60 Hz
Input Plug	16A German Type
Output Voltage	250VAC
Output Current	16A
Maximum Output Current	16A
Output Receptacles	(8)German Type
Physical	
Dimensions	486.4x45x45 mm
Installation	19 Inch
Weight	800 g
Shipping Dimensions	505x94x56 mm
Shipping Weight	1000 g
Color	Black
Power Cord Length	2.0 m (Factory Standard)
Environmental	
Maximum Elevation	
Above MSL (Operating/Storage)	0 to 3,000 m/ 0 to 15,000m
Humidity (Operating/Storage)	5 - 95%RH/ 5-95, Non-condensing
Temperature (Operating/Storage)	0 - 45℃/ -20 to 70℃
Certifications	
Certifications	LVD.EMC

Notes:

\*The above drawings are for reference only, subject to the material object.

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOU NOTICE.

REV.20210220.1