



VPB15F4-06F/4H

Description

VPB series PDU is the device power access solution provided by VERICOM and used to power IT equipment. VPB15F4-06F/4H features US plug input 15A125VAC, 06 Port US outlets protected by a switch. It is horizontal installation and black.

Features & Benefits

Convenient Installation

Rotating fixed bracket, suitable for horizontal, vertical and other installation angles


- Thicker Cable
 - Less resistance, stable current, stable conduction, safe use of electricity
- Comprehensive Protection

The main switch is equipped with a protective dust cover that prevents accidental shutoffs

- Sturdy and Durable
 - Made from high ductile strength material that resists damage
- Grounding Design

Reasonable grounding design prevents accidental electric shock

Installation Dimensions

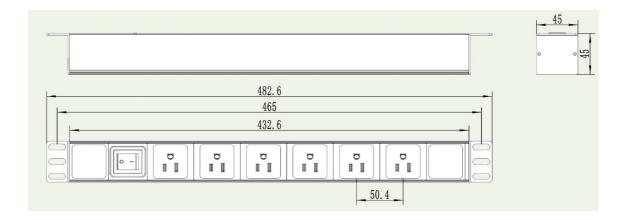

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210220.1





VPB15F4-06F/4H

Product Specifications

Electrical	
Input Voltage	125VAC
Input Current	15A
Input Frequency	50/60 Hz
Input Plug	15A US Type
Output Voltage	125VAC
Output Current	15A
Maximum Output Current	15A
Output Receptacles	(6) US Type
Physical	
Dimensions	482.6x45x45 mm
Installation	19 Inch
Weight	800 g
Shipping Dimensions	505x94x56 mm
Shipping Weight	1000 g
Color	Black
Power Cord Length	2.0 m (Factory Standard)
Environmental	
Maximum Elevation Above MSL (Operating/Storage)	0 to 3,000 m/ 0 to 15,000m
Humidity (Operating/Storage)	5 - 95%RH/ 5-95, Non-condensing
Temperature (Operating/Storage)	0 - 45℃/ -20 to 70℃
Certifications	
Certifications	LVD.EMC

Notes:

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210220.1

^{*}The above drawings are for reference only, subject to the material object.