



#### VPB15F4-08F/4H


## Description

VPB series PDU is the device power access solution provided by VERICOM and used to power IT equipment. VPB15F4-08F/4H features US plug input 15A125VAC, 08 Port US outlets protected by a switch. It is horizontal installation and black.

#### Features & Benefits

- Convenient Installation
  - Rotating fixed bracket, suitable for horizontal, vertical and other installation angles
- Thicker Cable
  - Less resistance, stable current, stable conduction, safe use of electricity
- Comprehensive Protection
  - The main switch is equipped with a protective dust cover that prevents accidental shutoffs
- Sturdy and Durable
  - Made from high ductile strength material that resists damage
- Grounding Design
  - Reasonable grounding design prevents accidental electric shock

## **Installation Dimensions**

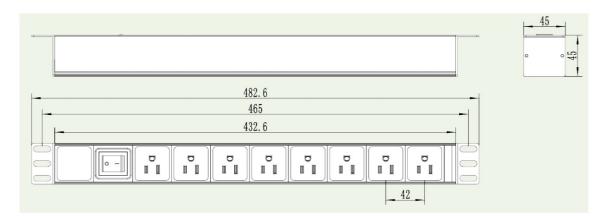

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210220.1





VPB15F4-08F/4H

# **Product Specifications**

| Electrical                      |                                 |
|---------------------------------|---------------------------------|
| Input Voltage                   | 125VAC                          |
| Input Current                   | 15A                             |
| Input Frequency                 | 50/60 Hz                        |
| Input Plug                      | 15A US Type                     |
| Output Voltage                  | 125VAC                          |
| Output Current                  | 15A                             |
| Maximum Output Current          | 15A                             |
| Output Receptacles              | (8) US Type                     |
| Physical                        |                                 |
| Dimensions                      | 482.6x45x45 mm                  |
| Installation                    | 19 Inch                         |
| Weight                          | 800 g                           |
| Shipping Dimensions             | 505x94x56 mm                    |
| Shipping Weight                 | 1000 g                          |
| Color                           | Black                           |
| Power Cord Length               | 2.0 m (Factory Standard)        |
| Environmental                   |                                 |
| Maximum Elevation               | 0 to 3,000 m/ 0 to 15,000m      |
| Above MSL (Operating/Storage)   |                                 |
| Humidity (Operating/Storage)    | 5 - 95%RH/ 5-95, Non-condensing |
| Temperature (Operating/Storage) | 0 - 45℃/ -20 to 70℃             |
| Certifications                  |                                 |
| Certifications                  | LVD.EMC                         |

### Notes:

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210220.1

<sup>\*</sup>The above drawings are for reference only, subject to the material object.