



VPB15F4-12F/4Z

Description

VPB series PDU is the device power access solution provided by VERICOM and used to power IT equipment. VPB15F4-12F/4Z features US plug input 15A125VAC, 12 Port US outlets protected by a switch. It is vertical installation and black.

Features & Benefits

Convenient Installation

Rotating fixed bracket, suitable for horizontal, vertical and other installation angles

Thicker Cable

Less resistance, stable current, stable conduction, safe use of electricity

Comprehensive Protection

The main switch is equipped with a protective dust cover that prevents accidental shutoffs


Sturdy and Durable

Made from high ductile strength material that resists damage

Grounding Design

Reasonable grounding design prevents accidental electric shock

Installation Dimensions

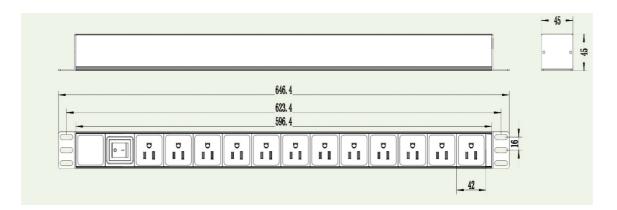

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210220.1





VPB15F4-12F/4Z

Product Specifications

Electrical	
Input Voltage	125VAC
Input Current	15A
Input Frequency	50/60 Hz
Input Plug	15A US Type
Output Voltage	125VAC
Output Current	15A
Maximum Output Current	15A
Output Receptacles	(12) US Type
Physical	
Dimensions	646.4x45x45 mm
Installation	19 Inch
Weight	1200 g
Shipping Dimensions	670x94x56 mm
Shipping Weight	1400 g
Color	Black
Power Cord Length	2.0 m (Factory Standard)
Environmental	
Maximum Elevation	
Above MSL (Operating/Storage)	0 to 3,000 m/ 0 to 15,000m
Humidity (Operating/Storage)	5 - 95%RH/ 5-95, Non-condensing
Temperature (Operating/Storage)	0 - 45℃/ -20 to 70℃
Certifications	
Certifications	LVD.EMC

Notes:

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210220.1

 $^{{}^\}star\mathsf{The}$ above drawings are for reference only, subject to the material object.